





CAGE WORKS

LOCK IT DOWN

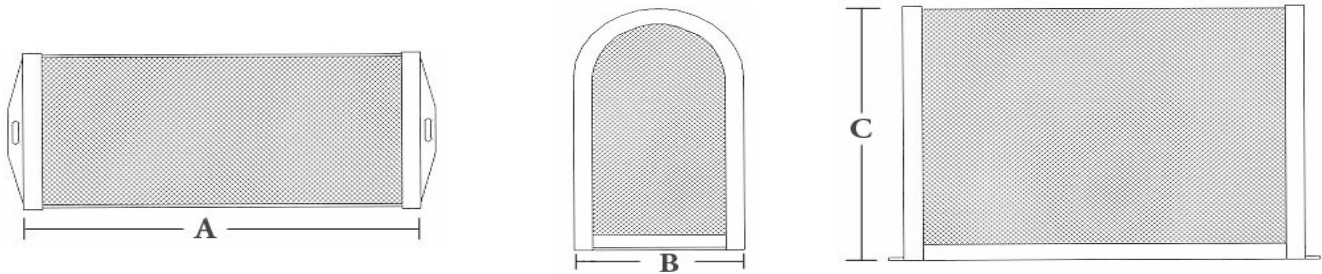

Model	A Dimension	B Dimension	C Dimension	Access style	Eye Bolt Spacing	Weight
CWA5	12"	13.5"	17.75"	Lift Off	13 3/4"	23 LBS
CWA10	24"	13.5"	24"	Lift Off	26"	33 LBS
CWA15	24"	13.5"	30"	Lift Off	26"	39 LBS
CWA20	32"	13.5"	24"	Lift Off	34"	38 LBS
CWA40	48"	18"	30"	Lift off	50"	60 LBS

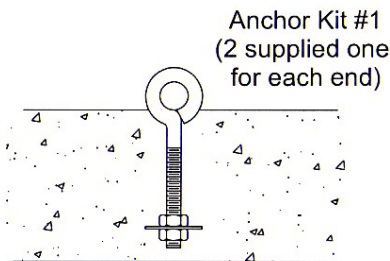

INSTALLATION:
 Adjust nuts so that washer is about 1-1/2" to 2-1/2" below loop on eye bolt. (nuts need only be hand tight.)
 While concrete is still wet, insert eye bolt assembly in until bottom of loop is at top of concrete.

- All steel angles to be 1-1/2" x 1-1/2" x 1/8" hot rolled and shall be A.S.T.M. A36.
- Expanded metal shall be 1/2" spaced, #13 gauge flattened diamond pattern steel There shall be no exposed ends of expanded metal on the outside of the enclosure.
- Expanded metal shall be die-formed" for uniformity.
- Welding shall be a minimum of 1/4" long weld on 4" spacing.
- All mounting brackets are permanently welded in place
- All corners of the enclosure shall be formed by steel to a 6" radius. All hardware shall be included and securely attached to each enclosure.
- All sizes shall withstand a minimum of 200 lbs. per square foot for 24 hours without deflection or distortion.
- Pre-Powder Coat Process– Grit (Sand) blast to remove mil scale.
- Powder Coat Process– Apply powder electro-statically.



PIR
 Sales, INC.

